

SPECIFICATION AGM 1601C-202

SPECIFICATION

CUSTOMER :		
MODULE NO.:	AGM 1601C - 202	

APPROVED BY:		
(FOR CUSTOMER USE ONLY)	PCB VERSION:	DATA:

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

VERSION	DATE	REVISED	SUMMARY
		PAGE NO.	
			Modify Precautions in
D	2016/01/27		use of LCD Modules
			& Static electricity test



MODLE NO:

RECORDS OF REVISION

DOC. FIRST ISSUE

VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2007/12/14		First issue
A	2008/09/12		Modify Character
			Generator ROM Pattern
В	2011/10/28		Correct ST7066IC
			information.
C	2014/08/21		Remove IC information
			Modify B/L information
D	2016/01/27		Modify Precautions in use
			of LCD Modules
			& Static electricity test

Contents

- 1. Precautions in use of LCD
- Modules 2.General Specification
- 3. Absolute Maximum Ratings
- 4. Electrical Characteristics
- 5. Optical Characteristics
- 6.Interface Pin Function
- 7. Contour Drawing & Block Diagram
- 8. Character Generator ROM Pattern
- 9.Reliability
- 10.Backlight Information
- 11.Inspection specification
- 12. Material List of Components for RoHs
- 13.Recommendable Storage

1.Precautions in use of LCD Modules

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.
- (8) AGT have the right to change the passive components, including R3,R6 & backlight adjust resistors. (Resistors, capacitors and other passive components will have different appearance and color caused by the different supplier.)
- (9) AGT have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance...etc, under the premise of not affecting the electrical characteristics and external dimensions, AGT have the right to modify the version.)
- (10) To ensure the stability of the display screen, please apply screen saver after showing 30 mins of fixed display content.

2.General Specification

Item	Dimension	Unit
Number of Characters	16 characters x 1Lines	_
Module dimension	80.0 x 36.0 x 13.2 (MAX)	mm
View area	66.0 x 16.0	mm
Active area	59.62 x 6.56	mm
Dot size	0.55 x 0.75	mm
Dot pitch	0.63 x 0.83	mm
Character size	3.07 x 6.56	mm
Character pitch	3.77 x 6.56	mm
LCD type	STN Positive, Yellow Green Transflective (In LCD production, It will occur slightly color can only guarantee the same color in the same be	
Duty	1/16	
View direction	6 o'clock	
Backlight Type	LED Yellow Green	
IC	ST7066U	


3.Absolute Maximum Ratings

Item	Symbol	Min	Тур	Max	Unit
Operating Temperature	T_{OP}	-20	_	+70	$^{\circ}\!\mathbb{C}$
Storage Temperature	T_{ST}	-30	_	+80	$^{\circ}\!\mathbb{C}$
Input Voltage	V _I	V _{SS}	_	$V_{ m DD}$	V
Supply Voltage For Logic	V _{DD} -V _{SS}	-0.3	_	7	V
Supply Voltage For LCD	V_{DD} - V_{o}	-0.3	_	13	V

4. Electrical Characteristics

Item	Symbol	Condition	Min	Тур	Max	Unit
Supply Voltage For Logic	V_{DD} - V_{SS}	_	4.5	5.0	5.5	V
Supply Voltage For LCD		Ta=-20°℃	_	_	5.6	V
*Note	V_{DD} - V_0	Ta=25°C	4.2	4.35	4.5	V
		Ta=70°C	3.7	_	_	V
Input High Volt.	V_{IH}	_	0.7 V _{DD}	_	$V_{ m DD}$	V
Input Low Volt.	V_{IL}	_	Vss	_	0.6	V
Output High Volt.	V_{OH}	_	3.9	_	V_{DD}	V
Output Low Volt.	V_{OL}	_	0	_	0.4	V
Supply Current	I_{DD}	V _{DD} =5.0V	1.0	1.2	1.5	mA


^{*} Note: Please design the VOP adjustment circuit on customer's main board




5.Optical Characteristics


Item	Symbol	Condition	Min	Тур	Max	Unit
	θ	CR≧2	0	_	20	$\psi = 180^{\circ}$
View Angle	θ	CR≧2	0	_	40	$\Psi = 0^{\circ}$
View Angle	θ	CR≧2	0	_	30	$\Psi = 90^{\circ}$
	θ	CR≧2	0	_	30	$\psi = 270^{\circ}$
Contrast Ratio	CR	_	_	3	_	_
Response Time	T rise	_	—	150	200	ms
	T fall	_	_	150	200	ms


Definition of Operation Voltage (Vop)





Definition of Response Time (Tr, Tf)






Conditions:

Operating Voltage: Vop Frame Frequency: 64 HZ Viewing Angle(θ , ϕ): 0° , 0° Driving Waveform: 1/N duty, 1/a bias


Definition of viewing angle(CR≥2)

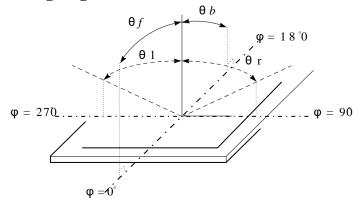


6.Interface Pin Function

Pin No.	Symbol	Level	Description
1	V _{SS}	0V	Ground
2	V_{DD}	5.0V	Supply Voltage for logic
3	VO	(Variable)	Operating voltage for LCD
4	RS	H/L	H: DATA, L: Instruction code
5	R/W	H/L	H: Read L: Write
6	Е	H,H→L	Chip enable signal
7	DB0	H/L	Data bit 0
8	DB1	H/L	Data bit 1
9	DB2	H/L	Data bit 2
10	DB3	H/L	Data bit 3
11	DB4	H/L	Data bit 4
12	DB5	H/L	Data bit 5
13	DB6	H/L	Data bit 6
14	DB7	H/L	Data bit 7
15	A	_	Power supply for B/L(+)
16	K	_	Power supply for B/L(-)

7. Contour Drawing & Block Diagram

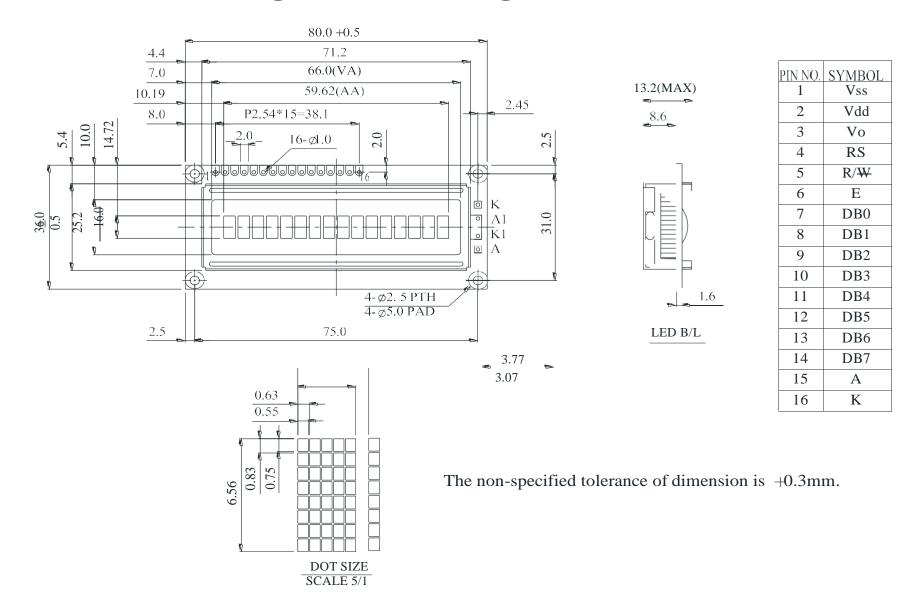

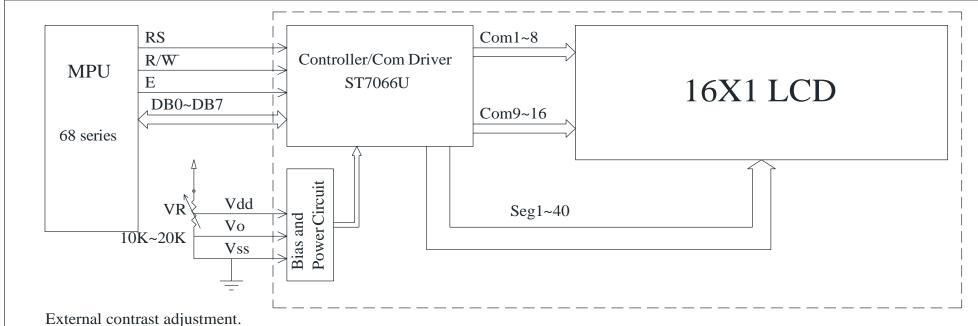

Character located 4 5 6 7 8 9 10 11 12 13 14 15 16 DDRAM address 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47

2-line display mode.

8.Character Generator ROM Pattern

Table.2

Upper																
4 bit	LLLL	LLLHI	LHL LI	LHH LE	LL LHI	н гнн	L LHHI	HLLL	HLLH I	ILHL H	LHH H	HLL HE	LH HH	HL HHI	нн	
Lower 4 bit								11222				122 111				
4 bit	CC			151515	*5*5*5	5555	***									
LLLL	CG RAM (1)			\$ \$\ \$ \$\ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	\$ \$555 \$	55 5 55 5 55 5 55 5 55 5 55 5 55 5 55		5555 5555 5555				****	\$555 5 55 5 55 5 55	555 555 555		fabbababa d d data data
LLLH	(2)		व व्यवविद	ರ ಡಡಡಡಡಡಡ ಚ	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$		555 555 555 5	55 55 5 55 55			555 555 555	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	555 555 555	5 5 5 55555	\$ \$ \$\$\$\$ \$\$\$\$ \$\$\$\$ \$\$\$\$	CARACA CACACACACACACACACACACACACACACACAC
LLHL	(3)		444 444	######################################	55 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		55 55 55 55 55 55 55 55 55 55 55 55 55	55 5 55 55			55 55 55	ያ ያ ማማማማ ማ	4 444 4 444	# # # # # # #	Addressed of the state of the s	44444
LLHH	(4)		4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	**************************************	**************************************	**************************************	**************************************	555 555 5555			4 4 4 4 4 4 4 4	4444 4444	555 555 555 55 55	55555 55555 55555 55	555 555 566	**************************************
LHLL	(5)		다. 다. 다. 다.다.다. 다. 다. 다. 다. 다.	44 4 4 4 4 444444 4	2000 P	######################################	\$250 B	444444 4 4 4 4			# # F	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4		4444444 4 4 4 4	chabbababa d d d dbababa	
LHLH	(6)		4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	**************************************	**************************************	da'a'a	5555 5555 5555	4444 4444 4444			55 55	ያ ያ ያ ያ ያ ያ ያ	4 4 4 4 4 4 4 4	**************************************		datata di di datatata
LHHL	(7)		44 44 44 44 44 44 44 44 44 44 44 44 44	44 44 44 44 44 44 44 44 44 44 44 44 44	444444 44444 44444	4444	44444 4 4 4	444 4 4			555555 55555 5	ಕ್ಕೆ ಆರ್ಡಿಕೆ ಆರ್ಡಿಕೆ ಕ್ಕೆ ಆರ್ಡಿಕೆ ಆರ್ಡಿಕೆ	555 5555	\$#\$\$# \$ \$#\$# \$ \$ \$####	chabbata d d d d d d data	44 44 44 44 44 44 44 44 44 44 44 44 44
LHHH	(8)		2 2 24 24 24 24 24 24 24 24 24 24 24 24 24	20 20 20 20 20 20 20 20 20 20 20 20 20 2	44444 4 4 4 4 4 4 4 444 4	444444 444 444444	9-9-9-9-				**************************************	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	**************************************	######################################	444 4 4 4 4 4 4 4444	त्र त्र त्रम्भत्र त्रम्भत्रम्
HLLL	(1)		444 4		ಚಿತ್ರಗಳಿಸಿದೆ ಕ್ಷ ಕ್ಷ ಚಿತ್ರಗಳಿಸಿ		44444444444444444444444444444444444444				व व विवेषि		# # # # # # # # # # # # # # # # # # #		de d	**************************************
HLLH	(2)		4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	**************************************	44444	### ### ###	2 2 2	55 55 55 55 55 55 55			19 19 19 19 19 19 19 19 19 19 19 19 19 1	है दिस दिस्किति दिस्किति	व विवेदविवेद	क्षक्षक्षि क्षक्षक्षक्षि क्षक्षक्षक्षक्षि	10 PM	CARRE CARRES CARRES
HLHL	(3)		हैं हैं हैं हैं हैं है है			**************************************	LS LS	55555 5 5			55555 5 5 5,5555	######################################	ರೇಶಿಲೆಲೆ ರೆ ರೇಶಿಲೆಲೆ	44444 4 4 4 4	el el elekkratet el	**************************************
нцнн	(4)		55555 55555 55555	55 55 5 5 5	विवेदविवेदविवेद दे दे दे दे दे	\$\$\$\$\$\$\$	वेषवेषवेषवेषवेषवेषवेषवेषवेषवेषवेषवेषवेषव	## ## #			# 4 4 4 44 4444 4	ರಿ ಚಿಕ್ಕಳಿಗೆ ಕಡೆಕ್ಕಿ	**************************************	**************************************	4 4 4 4	44444444444444444444444444444444444444
HHLL	(5)		55 55 55	5 5 5 5 5	######################################	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	ರ್ ಚಿಡೆಡೆಡೆಡೆಡೆ ಸ				\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	4 4 4 4 4 4 4 4 4 4 4 4	55555 55 55 55	55 55 56 55 5		CARARA CARA CARA CARARA
ннгн	(6)		******	55555 55555	4444444 44 44 444 444444	******************	\$ \$5\$\$ \$ \$5\$\$ \$ \$5\$\$ \$ \$5\$\$	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4			555 55 55555	**************************************	5 5 5 5 5	55 5 5	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	5 55555 5
нннг	(7)		5 5	**************************************	4444444 4 4 4 4 4444444	5 5	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	**************************************			5555 5555 5555				2000 CHARARA C	
нннн	(8)		**************************************	5 5 5 5 5 5	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	55555	55 55 55 55 55 55 55 55	55 55555 55			10 10 10 10 10 10 10 10 10 10 10 10 10 1	4 44 4 4 44 4 444	55555 5 5 5 5	555 555 555		ሪካያሉያሉያሉያሉ መጀመሪያ መጀመሪያ መመመመመመመመመመመመመመመመመመመመመመመመመመመመመመመመመመ

9. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

	Environmental Test		
Test Item	Content of Test	Test Condition	Not e
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1
High Temperature/ Humidity storage	The module should be allowed to stand at 60 °C,90% RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°€,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20°C 25°C 70°C 30min 5min 30min 1 cycle	-20°C/70°C 10 cycles	_
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude: 1.5mm Vibration Frequency: 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±600V(contact), ±800v(air), RS=330Ω CS=150pF 10 times	

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal

Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

10. Backlight Information

Specification

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	ILED	117	130	156	mA	V=4.1V
Supply Voltage	v	3.9	4.1	4.3	v	-
Reverse Voltage	VR	-	-	8	v	-
Luminance (Without LCD)	IV	216	270	-	CD/M ²	ILED=130mA
Wave Length	λp	569	570	573	nm	ILED=130mA
Life Time	-	-	100000	-	Hr.	ILED≦130mA 25°C,50-60%RH
Color	Color Yellow Green					

Note: The LED of B/L is drive by current only, drive voltage is for reference only. drive voltage can make driving current under safety area (current between minimum and maximum).

2.Drive from pin15,pin16

$$\begin{array}{c|c} R & R & A \\ K & B/L \\ LCM \end{array}$$

ill never get Vee output from pin15)

11.Inspection specification

NO	Item	Criterion				AQL	
01	Electrical Testing	Missing vertical, horizontal segment, segment contrast defect. Missing character, dot or icon. Display malfunction. No function or no display. Current consumption exceeds product specifications. LCD viewing angle defect. Mixed product types. Contrast defect.					
02	Black or white spots on LCD (display only)	 2.1 White and black spots on display ≤0.25mm, no more than three white or black spots present. 2.2 Densely spaced: No more than two spots or lines within 3mm 					
LCD black spots, white spots, contamination (non-display)		3.1 Round type : As follow $\Phi = (x + y) / 2$ $X \qquad Y$ $X \qquad Y$ 3.2 Line type : (As follow Length		SIZE $ \Phi \le 0.10 $ $ 0.10 < \Phi \le 0.20 $ $ 0.20 < \Phi \le 0.25 $ $ 0.25 < \Phi $	Acceptable Q TY 0.10 Accept no dense ≤ 0.20 2 ≤ 0.25 1 0 ag) Acceptable Q TY		
		1	≤3.0 ≤2.5	$0.02 < W \le 0.02$ $0.03 < W \le 0.05$ $0.05 < W$	Accept no dense 2 As round type	2.5	
04	Polarizer bubbles	If bubbles are visible judge using black subspecifications, not to find, must check specify direction.	pot easy	Size Φ $ Φ \le 0.20 $ $ 0.20 < Φ \le 0.50 $ $ 0.50 < Φ \le 1.00 $ $ 1.00 < Φ $ $ Total Q TY$	Acceptable Q TY Accept no dense 3 2 0 3	2.5	

NO	Item	Criterion			AQL		
05	Scratches	Follow NO.3 LCD bla	ack spots, white spots, c	ontamination			
		Symbols Define:					
		x: Chip length	y: Chip width z: C	Thip thickness			
		k: Seal width	t: Glass thickness a: L	CD side length			
		L: Electrode pad lengt	th:				
		6.1 General glass chip):				
		6.1.1 Chip on panel su	urface and crack between	n panels:			
		z: Chip thickness	y: Chip width	x: Chip length			
		Z≦1/2t	Not over viewing	x≤1/8a			
06	Chipped		area		2.5		
	glass	$1/2t < z \leq 2t$	Not exceed 1/3k	x≤1/8a			
		⊙If there are 2 or mo	re chips, x is total length	n of each chip.			
		6.1.2 Corner crack:	y				
		z: Chip thickness	y: Chip width	x: Chip length			
		Z≦1/2t	Not over viewing	x ≤ 1/8a			
			area				
		$1/2t < z \le 2t$	Not exceed 1/3k	x≤1/8a			
		☐ If there are 2 or mo	re chips, x is the total le	ngth of each chip.			

NO	Item	Criterion					AQL	
		Symbols:						
		-	Chip width	z: Chip thic	kness			
			Glass thickness	a: LCD side	length			
		L: Electrode pad length						
		6.2 Protrusion over term	inal:					
	6.2.1 Chip on electrode pad :							
06	Glass		x: Chip length $x \le 1/8a$ rtion:		$\frac{\text{nip thickness}}{z \leq t}$		2.5	
		r Cli ili	Cl. 1	.1	C1: .1:1	1		
		y: Chip width	x: Chip leng		Chip thickness			
		$y \le L$	$x \le 1/8a$		$< z \le t$			
		⊙ If the chipped area tou						
		remain and be inspected	_		=			
		⊙ If the product will be l	neat sealed by th	e customer, t	he alignment ma	ark not		
		be damaged.						
		6.2.3 Substrate protubera	ance and interna	crack.				
			y: widtl	1	x: length			
			y≤1/3I		$x \leq a$			
		Y.A.			l			
		980						

NO	Item	Criterion	AQL		
07	Cracked glass	The LCD with extensive crack is not acceptable.	2.5		
		8.1 Illumination source flickers when lit.	0.65		
00	Backlight	8.2 Spots or scratched that appear when lit must be judged.	2.5		
08	elements	Using LCD spot, lines and contamination standards.			
		8.3 Backlight doesn't light or color wrong.	0.65		
		9.1 Bezel may not have rust, be deformed or have fingerprints,	2.5		
09	Bezel	stains or other contamination.			
		9.2 Bezel must comply with job specifications.	0.65		
		10.1 COB seal may not have pinholes larger than 0.2mm or	2.5		
		contamination.			
		10.2 COB seal surface may not have pinholes through to the IC.	2.5		
		10.3 The height of the COB should not exceed the height	0.65		
		indicated in the assembly diagram.			
		10.4 There may not be more than 2mm of sealant outside the	2.5		
		seal area on the PCB. And there should be no more than three			
		places.			
		10.5 No oxidation or contamination PCB terminals.	2.5		
10	PCB · COB	10.6 Parts on PCB must be the same as on the production	0.65		
10		characteristic chart. There should be no wrong parts, missing			
		parts or excess parts.			
		10.7 The jumper on the PCB should conform to the product	0.65		
		characteristic chart.			
		10.8 If solder gets on bezel tab pads, LED pad, zebra pad or	2.5		
		screw hold pad, make sure it is smoothed down.			
		10.9 The Scraping testing standard for Copper Coating of PCB	2.5		
		X			
		$X * Y \leq 2mm^2$			
		11.1 No un-melted solder paste may be present on the PCB.	2.5		
		11.2 No cold solder joints, missing solder connections,	2.5		
11	Soldering	oxidation or icicle.			
		11.3 No residue or solder balls on PCB.	2.5		
		11.4 No short circuits in components on PCB.	0.65		

NO	Item	Criterion	AQL
		12.1 No oxidation, contamination, curves or, bends on interface	2.5
		Pin (OLB) of TCP.	
		122 No cracks on interface pin (OLB) of TCP.	0.65
		123 No contamination, solder residue or solder balls on product.	2.5
		12.4 The IC on the TCP may not be damaged, circuits.	2.5
		12.5 The uppermost edge of the protective strip on the interface	2.5
		pin must be present or look as if it cause the interface pin to sever.	
	Cananal	12.6 The residual rosin or tin oil of soldering (component or chip	2.5
12	General	component) is not burned into brown or black color.	
	12.8 Pi 12.9 L	127 Sealant on top of the ITO circuit has not hardened.	2.5
		12.8 Pin type must match type in specification sheet.	0.65
		129 LCD pin loose or missing pins.	0.65
		12.10 Product packaging must the same as specified on packaging	0.65
		specification sheet.	
		12.11 Product dimension and structure must conform to product	0.65
		specification sheet.	
		12.12 Visual defect outside of VA is not considered to be rejection.	0.65

12.Material List of Components for RoHs

1.A AGTechnologies Produtos Eletrônicos Ltda hereby declares that all of or part of products (with the mark "#"in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit A: The Harmful Material List

Material	(Cd)	(Pb)	(Hg)	(Cr6+)	PBBs	PBDEs
Limited	100	1000	1000	1000	1000	1000
Value	ppm	ppm	ppm	ppm	ppm	ppm

Above limited value is set up according to RoHS.

- **2.**Process for RoHS requirement : (only for RoHS inspection)
 - (1) Use the Sn/Ag/Cu soldering surface; the surface of Pb-free solder is rougher than we used before.
 - (2) Heat-resistance temp. : Reflow :

 250° C, 30 seconds Max.;

Connector soldering wave or hand soldering : 320°C, 10 seconds max.

(3) Temp. curve of reflow, max. Temp. : $235\pm5^{\circ}$ C;

Recommended customer's soldering temp. of connector : 280°C, 3 seconds.

13. Recommendable Storage

- 1. Place the panel or module in the temperature $25^{\circ}C\pm5^{\circ}C$ and the humidity below 65% RH
- 2. Do not place the module near organics solvents or corrosive gases.
- 3. Do not crush, shake, or jolt the module.

LCM Sample Estimate Feedback Sheet

Module Number:			Page: 1
1 · Panel Specification:			
1. Panel Type:	☐ Pass	□ NG ,	
2. View Direction:	☐ Pass	□ NG ,	
3. Numbers of Dots:	☐ Pass	□ NG ,	
4. View Area:	☐ Pass	☐ NG ,	
5. Active Area:	☐ Pass	□ NG ,	
6. Operating Temperature:	☐ Pass	☐ NG ,	
7. Storage Temperature:	☐ Pass	□ NG ,	
8. Others:	_		
2 · Mechanical Specification :			
1. PCB Size:	☐ Pass	☐ NG ,	
2. Frame Size:	☐ Pass	☐ NG ,	
3. Materal of Frame:	☐ Pass	□ NG ,	
4. Connector Position:	☐ Pass	□ NG ,	
5. Fix Hole Position:	☐ Pass	□ NG ,	
6. Backlight Position:	☐ Pass	□ NG ,	
7. Thickness of PCB:	☐ Pass	□ NG ,	
8. Height of Frame to PCB:	☐ Pass	□ NG ,	
9. Height of Module:	☐ Pass	□ NG ,	
10. Others:	☐ Pass	☐ NG ,	
3 · Relative Hole Size:			
1. Pitch of Connector:	☐ Pass	☐ NG ,	
2. Hole size of Connector:	☐ Pass	□ NG ,	
3. Mounting Hole size:	☐ Pass	□ NG ,	
4. Mounting Hole Type:	☐ Pass	□ NG ,	
5. Others:	☐ Pass	□ NG ,	
4 · Backlight Specification :			
1. B/L Type:	☐ Pass	□ NG ,	
2. B/L Color:	☐ Pass	☐ NG ,	
3. B/L Driving Voltage (Refere	ence for LE	D Type) : \square Pass	□ NG ,_
4. B/L Driving Current:	☐ Pass	☐ NG ,	
5. Brightness of B/L:	☐ Pass	☐ NG ,	
6. B/L Solder Method:	☐ Pass	☐ NG ,	
7. Others:	☐ Pass	☐ NG ,	

> > Go to page 2 < <

odule Number:		Page		
5 · Electronic Characteristics of	Module:			
1. Input Voltage:	☐ Pass	□ N		
2. Supply Current:	☐ Pass	\square N		
3. Driving Voltage for LCD:	☐ Pass	□ N		
4. Contrast for LCD:	Pass	\square N		
5. B/L Driving Method:	☐ Pass	□ N		
6. Negative Voltage Output:	☐ Pass	□ N		
7. Interface Function:	☐ Pass	□ N		
8. LCD Uniformity:	☐ Pass	□ N		
9. ESD test:	☐ Pass	\square N		
10. Others:	☐ Pass	□ N		
Sales signature:				
Customer Signature:		Date:	, ,	