

SPECIFICATION AGM 1602W-803



MODLE NO:

AGM 1602W-803

RECORDS OF REVISION

DOC. FIRST ISSUE

VERSION	DATE	REVISED PAGE NO.		SUMMARY
0	2007/05/23		Fi	rst issue
A	2008/05/08		M	odify backlight
			in	formation.
В	2008/09/22		M	odify Character
			G	enerator ROM Pattern
С	2008/10/14		M	odify backlight
			in	formation.
D	2009/04/28		M	odify backlight
			in	formation.
Е	2011/06/15		M	odify backlight
			in	formation.
F	2012/06/20		C	orrect ST7066IC
			in	formation.
G	2014/09/09		Re	emove IC information
			C	orrect contour drawing
Н	2015/01/22		M	odify Luminance

Contents

- 1.Precautions in use of LCD Modules
- 2.General Specification
- 3. Absolute Maximum Ratings
- 4. Electrical Characteristics
- 5. Optical Characteristics
- 6.Interface Pin Function
- 7. Contour Drawing & Block Diagram
- 8. Character Generator ROM Pattern
- 9.Reliability
- 10.Backlight Information
- 11.Inspection specification
- 12. Material List of Components for RoHs
- 13.Recommendable Storage

1.Precautions in use of LCD Modules

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2)Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.
- (8)AGT have the right to change the passive components, including R3,R6 & backlight adjust resistors. (Resistors, capacitors and other passive components will have different appearance and color caused by the different supplier.)
- (9)AGT have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance...etc, under the premise of not affecting the electrical characteristics and external dimensions, AGT have the right to modify the version.)

2.General Specification

Item	Dimension	Unit
Number of Characters	16 characters x 2Lines	_
Module dimension	84.0 x 44.0 x 13.5 (MAX)	mm
View area	66.0 x 16.0	mm
Active area	56.2 x 11.5	mm
Dot size	0.55 x 0.65	mm
Dot pitch	0.60 x 0.70	mm
Character size	2.95 x 5.55	mm
Character pitch	3.55 x 5.95	mm
LCD type	STN Negative, Blue Transmissive (In LCD production, It will occur slightly color can only guarantee the same color in the same be	
Duty	1/16	
View direction	6 o'clock	
Backlight Type	LED, White	
IC	ST7066U	


3.Absolute Maximum Ratings

Item	Symbol	Min	Тур	Max	Unit
Operating Temperature	T_{OP}	-20	_	+70	$^{\circ}\!\mathbb{C}$
Storage Temperature	T_{ST}	-30	_	+80	$^{\circ}\! \mathbb{C}$
Input Voltage	VI	V_{SS}	_	V_{DD}	V
Supply Voltage For Logic	$ m V_{DD} ext{-}V_{SS}$	-0.3	_	7	V
Supply Voltage For LCD	V_{DD} - V_{o}	-0.3	_	13	V

4.Electrical Characteristics

Item	Symbol	Condition	Min	Тур	Max	Unit
Supply Voltage For Logic	V_{DD} - V_{SS}	_	3.0	3.3	3.6	V
Supply Voltage For LCD		Ta=-20°C	_	_	5.2	V
*Note	V_{DD} - V_{0}	Ta=25°C	3.6	3.7	3.8	V
		Ta=70°C	3.2	_	_	V
Input High Volt.	V_{IH}	_	0.7 V _{DD}	_	V_{DD}	V
Input Low Volt.	V _{IL}	_	Vss	_	0.6	V
Output High Volt.	V_{OH}	_	0.7 V _{DD}	_	V_{DD}	V
Output Low Volt.	V_{OL}	_	0	_	$0.2V_{DD}$	V
Supply Current	I_{DD}	V _{DD} =3.3V	1.0	1.2	1.5	mA

^{*} Note: Please design the VOP adjustment circuit on customer's main board





5.Optical Characteristics

Item	Symbol	Condition	Min	Тур	Max	Unit
	θ	CR≧2	0	_	20	$\psi = 180^{\circ}$
Wang Angla	θ	CR≧2	0	_	40	$\Psi = 0^{\circ}$
View Angle	θ	CR≧2	0	_	30	$\Psi = 90^{\circ}$
	θ	CR≧2	0	_	30	$\psi = 270^{\circ}$
Contrast Ratio	CR	_	_	3	_	_
D T.	T rise	_	_	150	200	ms
Response Time	T fall	_	_	150	200	ms

Definition of Operation Voltage (Vop)

Definition of Response Time (Tr, Tf)

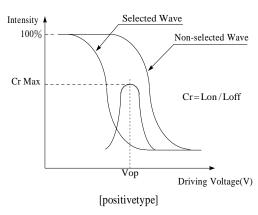

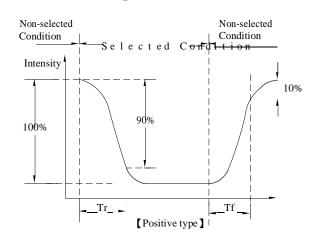


Conditions:

Operating Voltage: Vop Viewing Ar Frame Frequency: 64 HZ Driving Wa

Viewing Angle(θ , ϕ): 0° , 0° Driving Waveform: 1/N duty, 1/a bias


Definition of viewing angle ($CR \ge 2$)

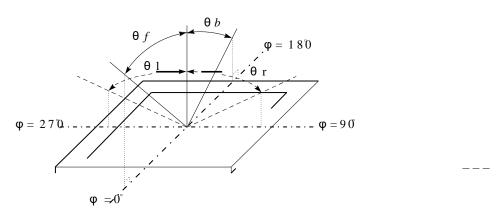


6.Interface Pin Function

Pin No.	Symbol	Level	Description
1	V_{SS}	0V	Ground
2	V_{DD}	3.3V	Supply Voltage for logic
3	VO	(Variable)	Operating voltage for LCD
4	RS	H/L	H: DATA, L: Instruction code
5	R/W	H/L	H: Read(MPU→Module) L: Write(MPU→Module)
6	Е	Н,Н→L	Chip enable signal
7	DB0	H/L	Data bus line
8	DB1	H/L	Data bus line
9	DB2	H/L	Data bus line
10	DB3	H/L	Data bus line
11	DB4	H/L	Data bus line
12	DB5	H/L	Data bus line
13	DB6	H/L	Data bus line
14	DB7	H/L	Data bus line
15	VEE	_	Negative voltage output
16	NC		No connection

7.Contour Drawing & Block Diagram

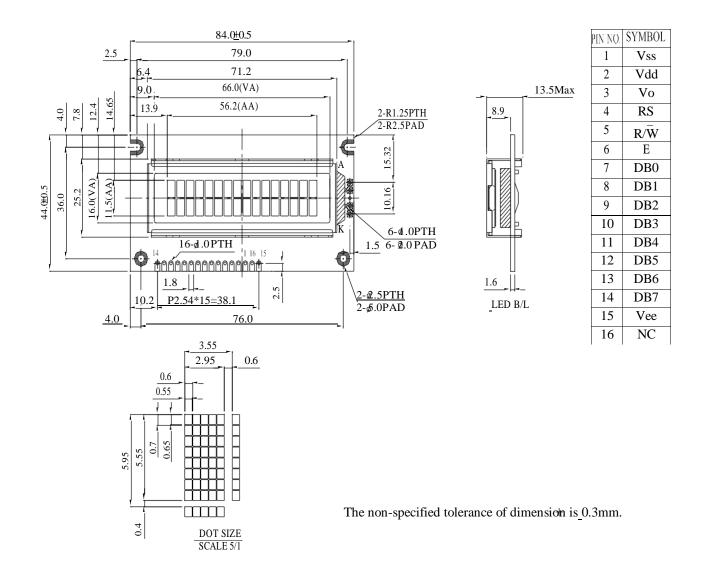

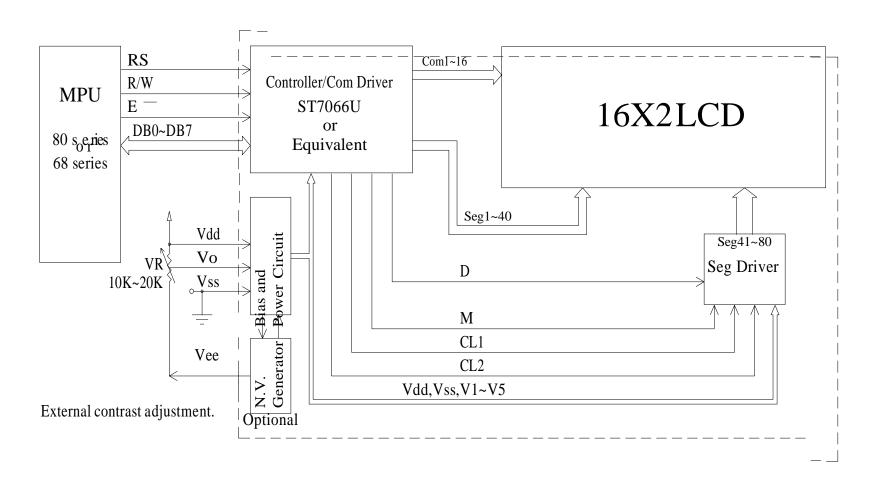

Character located

DDRAM address
DDRAM address

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 4E 4F

8.Character Generator ROM Pattern

Table.2

Upper																
4 bit Lower	LLLL	LLLH I	LHL L	LHH LE	LL LHI	н снн	L LHHI	H HLLL	HLLH	HLHL H	LHH H	HLL HE	LH НН	нь нні	нн	
4 bit																
LLLL	CG RAM (1)			\$\$\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$		**************************************	***	10 10 10 10 10 10 10 10 10 10 10 10 10 1				ጜጜጜጜጜ	5555 5 5 5 5 55	**** **** ****	444 4 4 4 4 4 4 4 4 4 4 4 4	dhhadadha G G G G G G Ah
LLLH	(2)		ರ ಚಿತ್ರಗಳ	200 200 200 200 200 200 200 200 200 200	55 5 5 5 5 5 5 5 5 5 5 5 5 5	44444 4444 4444 4444	\$\$\$ \$ \$\$\$\$ \$ \$	55 55 5 55 5 55 5 55			555 555 556	**************************************	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	\$ \$ \$ \$ \$	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	child children children children
LLHL	(3)		10 10 10 10 10 10 10 10 10 10 10 10 10 1	######################################				\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$			**************************************	5 5 5	4444 4444 44444	#2 #2 #3 #3 #4 #4 #4	ARMANAN GGGG GGGG GGGG	chable control control control chable
LLHH	(4)		200 P	######################################	**************************************	******** *******	5 555	555			*50	555555 555555 55555	555 5555 5	88888 8 88888		25 25 25 25 25 25 25 25 25 25 25 25 25 2
LHLL	(5)			#		**************************************					555	***	94444 4 94		PARAF	44 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
LHLH	(6)		**************************************	55 55 55 55 55 55 55 55 55 55 55 55 55	10 10 10 10 10 10 10 10 10 10 10 10 10 1	प्रकार विद्या	**************************************				***	\$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5 \$5	44444 4444 44444 4444	4 444 4 444	Address address and address an	dddd g g gaeth
LHHL	(7)		\$ \$55 \$55 \$55 \$55 \$55	*******	50 50 50 50 50 50 50 50 50 50 50 50 50 50 50		**************************************	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$			55555 55555	494 494 494 494 494 494	** **	**********************************	2552	
LHHH	(8)		**************************************	\$ 5 5 5 \$ 5 5 5 \$ 5 5 5 \$ 5 5 5 \$ 5	**************************************	4444 44 44 44 44 44 44 44 44 44 44 44 4	######################################	**************************************			**	**************************************	55555 55555	-		
HLLL	(1)		444 4	# ## # # ## # # # ##	200 A 400 A			*****************				# # # # # # # # # # # # # # # # # # #	5 5	विवेदीय	ANNA CA	
			**************************************	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	44444444444444444444444444444444444444	444 44 444 44	-53	**************************************			***	4 44 44 44 44 44 44 44 44 44 44 44 44 4		GGGGG GGGGGG GG	15 Apr	chine c c c c c c c c c c c c c c c c c c c
HLHL	(3)		2	25	14444 14444	55555 5555 5555 5555 5555 5555 5555 5555	\$ \$5\$5	255 25555 25555			****************	6 6 6 6 6	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	e e e e	er Alabara er	*****
НЦНН	(4)		\$ \$\$\$\$\$ \$\$\$\$\$	1515		#5	####### # # # # #	**************************************			\$555 \$555 \$555 \$555 \$555		555555 55555	\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	4444 4444 44444 44444 44444 44444 44444
HHLL	(5)		***		5 555555555555555555555555555555555555		\$ & & & & & & & & & & & & & & & & & & &	ಚಿಡಚಿಡಚಿಡಿ			5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	10 10 10 10 10 10 10 10 10 10 10 10 10 1	50 50 50 50 50 50 50 50 50 50 50 50 50 5	ARE CARRAGES CARAGES CARRAGES	Charlett Park Charlett Park
			55555	ರ್ಥಕ್ಷ ಚಿಕ್ಕಿಗಳ	######################################	**************************************	44444 4444 4444 4444 4444 4444 4444 4444	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4			555 5 5 55555	**************************************	5 5 5 5 5	**************************************		5 55555 5
ннН	(6)		10 10 10 10	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	\$5\$\$\$\$\$\$	5 5 5 5	55 55 55 55 55 55 55 55 55 55 55 55 55	5 5 5 5 5			5555 5555 5555	555 555 555 555 555 555 555	\$5\$\$ \$5\$\$ \$5\$	5 5 5	CHARAR Constraint Cons	
			-5°	5 5 5 5	55 5 5 5 5 5 5 5 5 5	55555	\$\$\$ \$ \$ \$ \$ \$ \$	ক কলকেক ক ক			\$ \$ \$ \$ \$ \$ \$ \$ \$	5 5 5 5 5 5 5 5	55555 5 5 5	55 55 55 55 55 55	* ** ********	ሪካያቸውቸውቸውቸው የሚያለው የተመመመር የሚያለው የተመመመር የሚያለው የተመመመር የሚያለው የተመመመር የሚያለው የመመመር የሚያለው የመመመር የሚያለው የመመመር የ

9. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

	Environmental Test		
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1
High Temperature/ Humidity storage	The module should be allowed to stand at 60 °C,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20°C 25°C 70°C	-20°C/70°C 10 cycles	
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude: 1.5mm Vibration Frequency: 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V,RS=1.5k Ω CS=100pF 1 time	

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.


10.Backlight Information

Specification

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	ILED	-	32	40	mA	V=3.5V
Supply Voltage	V	3.4	3.5	3.6	V	-
Reverse Voltage	VR	-	-	5	V	-
Luminance (Without LCD)	IV	496	620	-	CD/M ²	ILED=32mA
LED Life Time (For Reference only)	-	-	50K	-	Hr.	ILED=32mA 25°C,50-60%RH, (Note 1)
Color	White	1	1	1	1	

Note: The LED of B/L is drive by current only, drive voltage is for reference only. drive voltage can make driving current under safety area (current between minimum and maximum).

Note 1:50K hours is only an estimate for reference.

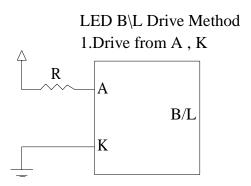

11.Inspection specification

NO	Item	Criterion				AQL
01	Electrical Testing	Missing charac Display malfun No function or	ter, dot or ction. no display aption excended effect types.	eeds product specif		0.65
02	Black or white spots on LCD (display only)	three white or b	olack spots	•	mm, no more than or lines within 3mm	2.5
03	LCD black spots, white spots,	3.1 Round type $\Phi = (x + y)/2$	<u>↓</u> Y	SIZE $\Phi \le 0.10$ $0.10 < \Phi \le 0.20$ $0.20 < \Phi \le 0.25$ $0.25 < \Phi$	Acceptable Q TY Accept no dense 2 1 0	2.5
	contamination (non-display)	3.2 Line type:	$ \begin{array}{c c} \text{Length} \\ \hline \\ \text{L} & \leq 3.0 \\ \text{L} & \leq 2.5 \\ \hline \\ \end{array} $	width $W \le 0.02$ $0.02 < W \le 0.03$ $0.03 < W \le 0.05$ $0.05 < W$	Acceptable Q TY Accept no dense 2 As round type	2.5
04	Polarizer bubbles	If bubbles are v judge using bla specifications, to find, must ch specify direction	ck spot not easy neck in	Size Φ $ Φ \le 0.20 $ $ 0.20 < Φ \le 0.50 $ $ 0.50 < Φ \le 1.00 $ $ 1.00 < Φ $ $ Total Q TY$	Acceptable Q TY Accept no dense 3 2 0 3	2.5

NO	Item	Criterion			AQL
05	Scratches	Follow NO.3 LCD bla	ack spots, white spots, c	ontamination	
		Symbols Define:			
		x: Chip length	y: Chip width z: C	thip thickness	
		k: Seal width	t: Glass thickness a: L	CD side length	
		L: Electrode pad lengt	h:		
		6.1 General glass chip	:		
		6.1.1 Chip on panel su	rface and crack between	n panels:	
		z: Chip thickness	y: Chip width	x: Chip length	
		Z≦1/2t	Not over viewing	x≤1/8a	
06	Chipped		area		2.5
	glass	$1/2t < z \leq 2t$	Not exceed 1/3k	x≤1/8a	
		6.1.2 Corner crack:	re chips, x is total lengtl	i of each chip.	
		z: Chip thickness	y: Chip width	x: Chip length	
		Z≦1/2t	Not over viewing area	x≤1/8a	
		$1/2t < z \leq 2t$	Not exceed 1/3k	x ≤ 1/8a	
		☐ If there are 2 or more	re chips, x is the total le	ngth of each chip.	
1					

NO	Item	Criterion	AQL
		Symbols: x: Chip length y: Chip width z: Chip thickness k: Seal width t: Glass thickness a: LCD side length L: Electrode pad length 6.2 Protrusion over terminal: 6.2.1 Chip on electrode pad:	
06	Glass	$\begin{array}{ c c c c c }\hline y: Chip \ width & x: Chip \ length & z: Chip \ thickness \\\hline y \leq 0.5mm & x \leq 1/8a & 0 < z \leq t \\\hline 6.2.2 \ Non-conductive \ portion: \\\hline \end{array}$	2.5
		$y: Chip \ width \qquad x: Chip \ length \qquad z: Chip \ thickness \\ y \le L \qquad x \le 1/8a \qquad 0 < z \le t \\ \hline \odot \ If \ the \ chipped \ area \ touches \ the \ ITO \ terminal, \ over \ 2/3 \ of \ the \ ITO \ must remain \ and \ be \ inspected \ according \ to \ electrode \ terminal \ specifications. \\ \hline \odot \ If \ the \ product \ will \ be \ heat \ sealed \ by \ the \ customer, \ the \ alignment \ mark \ not \ be \ damaged. \\ \hline 6.2.3 \ Substrate \ protuberance \ and \ internal \ crack. \\ \hline y: \ width \qquad x: \ length \\ \hline y \le 1/3L \qquad x \le a$	

NO	Item	Criterion	AQL		
07	Cracked glass	The LCD with extensive crack is not acceptable.			
08	Backlight elements	8.1 Illumination source flickers when lit.	0.65		
		8.2 Spots or scratched that appear when lit must be judged.	2.5		
		Using LCD spot, lines and contamination standards.			
		8.3 Backlight doesn't light or color wrong.	0.65		
09	Bezel	9.1 Bezel may not have rust, be deformed or have fingerprints,			
		stains or other contamination.			
		9.2 Bezel must comply with job specifications.	0.65		
	PCB · COB	10.1 COB seal may not have pinholes larger than 0.2mm or	2.5		
		contamination.			
		10.2 COB seal surface may not have pinholes through to the IC.			
		10.3 The height of the COB should not exceed the height	0.65		
		indicated in the assembly diagram.			
		10.4 There may not be more than 2mm of sealant outside the	2.5		
		seal area on the PCB. And there should be no more than three			
		places.			
		10.5 No oxidation or contamination PCB terminals.	2.5		
10		10.6 Parts on PCB must be the same as on the production	0.65		
10		characteristic chart. There should be no wrong parts, missing			
		parts or excess parts.			
		10.7 The jumper on the PCB should conform to the product	0.65		
		characteristic chart.			
		10.8 If solder gets on bezel tab pads, LED pad, zebra pad or	2.5		
		screw hold pad, make sure it is smoothed down.			
		10.9 The Scraping testing standard for Copper Coating of PCB	2.5		
		X			
		X * Y<=2mm2			
11	Soldering	11.1 No un-melted solder paste may be present on the PCB.	2.5		
		11.2 No cold solder joints, missing solder connections,	2.5		
		oxidation or icicle.			
		11.3 No residue or solder balls on PCB.	2.5		
		11.4 No short circuits in components on PCB.	0.65		

NO	Item	Criterion	AQL
		12.1 No oxidation, contamination, curves or, bends on interface	2.5
		Pin (OLB) of TCP.	
		122 No cracks on interface pin (OLB) of TCP.	0.65
		123 No contamination, solder residue or solder balls on product.	2.5
		124 The IC on the TCP may not be damaged, circuits.	2.5
		125 The uppermost edge of the protective strip on the interface	2.5
		pin must be present or look as if it cause the interface pin to sever.	
	General appearance	12.6 The residual rosin or tin oil of soldering (component or chip	2.5
12		component) is not burned into brown or black color.	
		12.7 Sealant on top of the ITO circuit has not hardened.	2.5
		12.8 Pin type must match type in specification sheet.	0.65
		129 LCD pin loose or missing pins.	0.65
		12.10 Product packaging must the same as specified on packaging	0.65
		specification sheet.	
		12.11 Product dimension and structure must conform to product	0.65
		specification sheet.	
		12.12 Visual defect outside of VA is not considered to be rejection.	0.65

12.Material List of Components for

RoHs

AGTECHNOLOGIES hereby declares that all of or part of products (with the mark
"#"in code), including, but not limited to, the LCM, accessories or packages, manufactured
and/or delivered to your company (including your subsidiaries and affiliated company)
directly or indirectly by our company (including our subsidiaries or affiliated companies) do
not intentionally contain any of the substances listed in all applicable EU directives and
regulations, including the following substances.

Exhibit A = The Harmful Material List

Material	(Cd)	(Pb)	(Hg)	(Cr6+)	PBBs	PBDEs		
Limited Value	100 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm		
Above limited value is set up according to RoHS								

2. Process for RoHS requirement:

- (1) Use the Sn/Ag/Cu soldering surface; the surface of Pb-free solder is rougher than we used before.
- (2) Heat-resistance temp. :

Reflow: 250° C, 30 seconds Max.;

Connector soldering wave or hand soldering : 320°C, 10 seconds max.

(3) Temp. curve of reflow, max. Temp. $: 235\pm5^{\circ}C$;

Recommended customer's soldering temp. of connector : 280°C, 3 seconds.

13. Recommendable Storage

- 1. Place the panel or module in the temperature 25°C±5°C and the humidity below 65% RH
- 2. Do not place the module near organics solvents or corrosive gases.
- 3. Do not crush, shake, or jolt the module.