


# AGM-050A1-I1-C

## Features:

- Based on T5L2, running DGUS II system, commercial grade.
- 5.0-inch, 720\*1280 pixels resolution, 16.7M colors, IPS-TFT-LCD, wide viewing angle.
- Incell touch screen.



## 1. Hardware interface

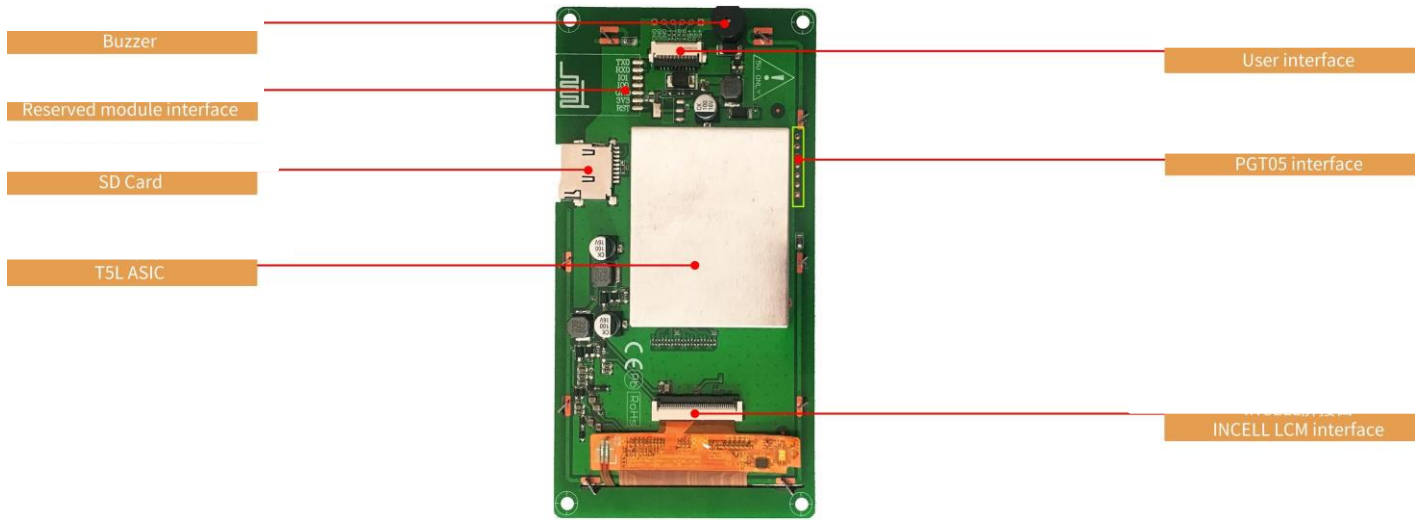

Hardware interface

## 1.1 Interface description

No.	Name	Description
1	T5L2 ASIC	Mass production in 2019,1MBytes Nor Flash on the chip, 512KBytes used to store the user database. Rewrite cycle: over 100,000 times
2	INCELL LCM interface	FPC40_0.5mm, MIPI interface
3	User interface	10Pin_1.0mm latching socket for power supply and serial communication. Download rate(typical value): 12KByte/s
4	Flash	16MBytes NOR Flash, for fonts, pictures and audio files. Rewrite cycle: over 100,000 times
5	Buzzer	3V passive buzzer. Power: <1W
6	SD interface	FAT32. Download files by SD interface can be displayed in statistics. Download rate: 4Mb/s
7	Reserved module interface	Wi-Fi module: connect to the cloud platform to update remotely USB module: download files by USB flash disk
8	PGT05 interface	When product crashes by accident, you can use PGT05 to update DGUS kernel and make the product return to normal

## Display parameters

<b>LCD Type</b>	IPS, TFT LCD
<b>Viewing Angle</b>	Wide viewing angle, 85°/85°/85°/85° (L/R/U/D)
<b>Resolution</b>	720×1280 pixels (0°/90°/180°/270°)
<b>Color</b>	24-bit 8R8G8B
<b>Active Area (A.A.)</b>	62.1mm (W)×110.40mm (H)
<b>View Area (V.A.)</b>	63.1mm (W)×111.4mm (H)
<b>Backlight Mode</b>	LED
<b>Backlight Service Life</b>	>20000 hours (Time of the brightness decaying to 50% on the condition of continuous working with the maximum brightness)
<b>Brightness</b>	270nit
<b>Brightness Control</b>	0~100 grade (When the brightness is adjusted to 1%~30% of the maximum brightness, flickering may occur and is not recommended to use in this range)
<b>Note: Long time display of high contrast still image over 30 minutes may lead to display residual shadow, please use screen saver to avoid this problem.</b>	

### 2.1 Touch parameters

<b>Type</b>	CTP (Capacitive touch panel)
<b>Structure</b>	INCELL structure
<b>Touch Mode</b>	Support point touch and drag
<b>Surface Hardness</b>	-
<b>Light Transmittance</b>	Over 95%
<b>Life</b>	Over 1,000,000 times touch

## 2.2 Serial interface parameters

<b>Mode</b>	UART4: TTL/CMOS (OS Only available after OS configuration)				
<b>Voltage Level</b>	Test Condition	Min	Typ	Max	Unit
	Output 1, I <sub>out</sub> = 1mA	3.0	3.3	-	V
	Output 0, I <sub>out</sub> = -1mA	-	0	0.3	V
	Input 1, I <sub>in</sub> = 1mA	2.4	3.3	5.0	V
	Input 0, I <sub>in</sub> = -1mA	0	-	0.5	V
<b>Baud Rate</b>	3150~3225600bps, typical value of 115200bps				
<b>Data Format</b>	UART2: N81 UART4: N81/E81/O81/N82 (OS) 4 modes (OS configuration)				
<b>Interface Cable</b>	10Pin_1.0mm				

## 2.3 Electrical specifications

<b>Rated Power</b>	<5W	
<b>Operating Voltage</b>	4.5~5.5V, typical value of 5V	
<b>Operating Current</b>	440mA	VCC=5V, max backlight
	120mA	VCC=5V, backlight off
<b>Recommended power supply: 5V 1A DC</b>		

## 2.4 Operating environment

<b>Operating Temperature</b>	-20°C~70°C (5V @ 60% RH)
<b>Storage Temperature</b>	-30°C~80°C
<b>Conformal coating</b>	None
<b>Operating Humidity</b>	10%~90%RH, typical value of 60% RH

### 3、Reliability test

#### 3.1 Electrostatic discharge test

Test temperature: 25°C. Test humidity: 50%RH.

Test process: the product was placed on the test bench to perform contact and air discharge in turn of the serial screen iron frame and display area as shown in Fig.3.1 below. During the experimental process, it was observed whether the screen is dead, black, white, splash, or reboot. According to the experiment results, the performance is in line with the criteria GB/T 17626.2 B level and above.



Electrostatic discharge test

Discharge Type	Discharge Value	Result
Contact discharge	±4KV	Normal operation
Air discharge	±4KV	Normal operation

#### 3.2 EFT test

Test temperature: 25°C. Test humidity: 50%RH.

Test process: the product was placed on the test bench to perform contact and the smart screen is energized by the power supply coupled with a EFT generator as shown in Fig. 3.2 below. During the experimental process, it was observed whether abnormal reset, display or touch phenomena occurs. According to the experiment results, the performance is in line with the criteria GB/T 17626.2 B level and above.



EFT test

Test Item	Test Standard	Result
Power supply	±1KV;100KHz	Normal operation

#### 4、Packaging & dimensions

<b>Form Factor</b>	71.8mm (W)× 133.9mm (H)× 9.4mm (T)
<b>Installation Dimensions</b>	Positioning hole: 68.4(+0.3mm)×119.2(+0.3mm)
<b>Net Weight</b>	68g

#### Packaging Standards


Model	Dimensions	Layer	Quantity/Layer	Quantity(Pcs)
1 Carton1:	220mm(L)×160mm(W)×47mm (H)	1	1	1
2 Carton2:	250mm(L)×200mm(W)×80mm (H)	2	2	4
3 Carton3:	320mm(L)×270mm(W)×80mm (H)	2	4	8
4 Carton4:	435mm(L)×335mm(W)×290mm(H)	-	-	-
5 Carton5:	600mm(L)×430mm(W)×290mm(H)	2	30	60

Disclaimer: the data is for reference only and the information of product design that do not affect performance parameters and utilization is subject to alternation without prior notice.



## 5、 Debugging tools

It is recommended for new users smart LCMs to purchase official accessories. For more details, please refer to customer service center.

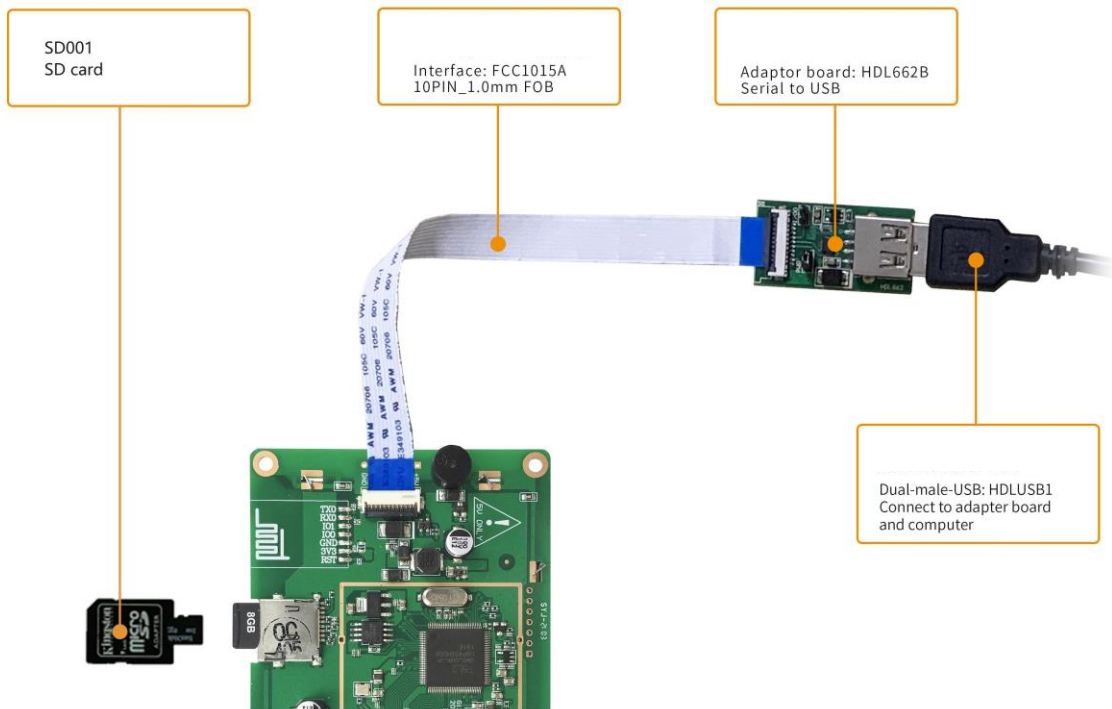

## 6、T5L series IC features

Mature and stable 8051 core which is the most widely used with the maximum operating frequency of T5L is up to 250MHz, 1T(single instruction cycle)high speed operation.

### (1) CPU (GUI CPU) DGUS II

Separate GUI CPU Core running DGUS II System:

- 2.4GB/S。

High-speed display memory, 2.4GB/S bandwidth.

- 2D, JPEG 200fps@1280\*800, UI

2D hardware acceleration, the decompression speed of JPEG is up to 200fps@1280\*800 and the UI with animation and icons as its main feature is extremely cool and smooth.

- JPEG 16Mbytes SPI Flash

Images and icons stored in JPEG format. Adopt Low-cost 16Mbytes SPI Flash.

- 400Hz

Support CTP or RTP with adjustable sensitivity and maximum 400 Hz touch frequency.

- 15bit 32Ksps PWM

1-way 15bit 32Ksps PWM digital power amplifier driver loudspeaker, save power amplifier cost and achieve high signal-to-noise ratio and sound quality restoration.

- 128Kbytes OS CPU

128Kbytes variable storage space for exchanging data with OS CPU Core and memory.

- PC

Support DGUS development and simulation on PC. Support background remote upgrade.

### (2) CPU (OS CPU) 8051 CPU:

Separate CPU (OS CPU) core runs user 8051 OS system and user CPU is omitted in practical application:

- 8051, 64Kbytes, 32Kbytes RAM。

Standard 8051 architecture and instruction set, 64Kbytes code space, 32Kbytes on-chip RAM.

- 64bit (MDU) , 64bit MAC 和 64bit。

64 bit integer mathematical operation unit (MDU), including 64 bit MAC and 64 bit divider.

- 28 个 IO, 4 UARTs, 1 CAN 8 12bit A/D, 2 16bit PWM。

28 IOs, 4-channel UARTs, 1-channel CAN, up to 8-channel 12-bit A/Ds and 2-channle 16-bit PWM of adjustable resolution.

Support IAP on-line simulation and debugging with unlimited number of breakpoints.

---

Upgrade code online through DGUS system.

(4) 1Mbytes Flash

1Mbytes on-chip Flash patent encryption technology ensure code and data security.

(5) Operating temperature ranges from  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  (IC operating temperature customizable from  $-55^{\circ}\text{C}$  to  $105^{\circ}\text{C}$ ).

## 7、 Revision records

<b>Rev</b>	<b>Revise Date</b>	<b>Content</b>	<b>Editor</b>
00	2021-11-05	First Edition	