



# DMG48320C035\_03WTR

Based on T5L ASIC 3.5 Inches, 320xRGBx480, 16.7M Colors, TN screen

RTP, Standard instruction set (TA) / DGUS II system, Cost-Effective screen



## Record of Revision

Revise Date	Content
2019-03-27	First Edition



★ Display

Item	Parameter	Description
Color	16.7M (16777216) colors	24 bit color 8R8G8B
A.A)	49.0mm (W) x73.4mm (H)	320x480
(V.A)	49.7mm (W) x74.1mm (H)	320x480
Resolution	320x480	Support 0° /90° /180° /270° rotated display
Backlight	LED	≥ 10000H ( Continuous working with maximum brightness, time of brightness halves )
Brightness	250nit	TA system:64 levels adjustment; DGUS II system:100 levels adjustment (It's not recommend to set brightness to 1%~30% of the maximum,which may lead a flicker)

Note: Displaying of high-contrast still images for more than 30 minutes may result in residual images. Please add screen saver to avoid this problem.

★ Voltage & Current

Item	Conditions	Min	Typ	Max	Unit
Power Voltage	-	4.5	5.0	5.5	V
Operation Current	VCC = +5V, Backlight on	-	130	-	mA
	VCC = +5V, Backlight off	-	40	-	mA

5V 1A Recommended power supply: 5V 1A DC

★ Reliability Test

Item	Conditions	Min	Typ	Max	Unit
Working Temperature	60%RH at 5V voltage	-20	25	70	°C
Storage Temperature	-	-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH
Protective Paint	-	-	None	-	-

★ Interface

Item	Conditions	Min	Typ	Max	Unit
Baudrate	User Set	3150	115200	3225600	bps
Output Voltage (TXD)	Output 1, Iout = 8mA	3.0	-	3.3	V
	Output 0, Iout = -8mA	-	0	0.3	V
Input Voltage (RXD)	Input 1	2.7	3.3	-	V
	Input 0	0	-	1.2	V
Interface	UART2: N81, 3.3V & 5V TTL/CMOS UART4: N81/E81/O81/N82, 3.3V & 5V TTL/CMOS UART4: Optional N81/E81/O81/N82 four mode, 3.3V & 5V TTL/CMOS ( Be used after OS configuration )				
Socket	10Pin_1.0mm FCC Socket				
USB	None				
SDSlot	YES (SDHC/FAT32 Format)				

## ★ Memory

Item	Typical value	Features	Typ value	Unit	Description
FLASH (TA/ DGUS II)	16Mbytes	Space of Font	4-12	Mbytes	A single font of 256Kbytes, store font, icon libraries, and other binary files
		Picture Storage (.ICL file)	12-4	Mbytes	JPEG format (Picture quantity relate to JPEG size, size of a single JPEG image file should not exceed 256Kbytes)
RAM (DGUS II)	128Kbytes	Variable Storage Space	/	/	Data is not saved when power down
Nor Flash (DGUS II)	320Kbytes	User database	/	/	Data is saved when power down



## ★ UI &amp; Peripheral

UI & Peripheral	
UI Version	TA / DGUS II ( DGUS II (pre-installed) )
Peripheral	Resistive touch screen, Buzzer

## ★ Packing Capacity &amp; Dimension

Dimension				
Dimension	103.3(W) × 61.1(H) × 12.1(T) mm			
Net Weight	65g			
Packing Capacity				
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)
1 Carton1:	220mm(L)×160mm(W)×47mm (H)	1	2	2
2 Carton2:	250mm(L)×200mm(W)×80mm (H)	2	2	4
3 Carton3:	320mm(L)×270mm(W)×80mm (H)	2	4	8
4 Carton4:	450mm(L)×350mm(W)×300mm(H)	2	25	50
5 Carton5:	600mm(L)×450mm(W)×300mm(H)	2	60	120

Remark: there is no extra-notice if the product design changes that do not affect performance parameters and use.

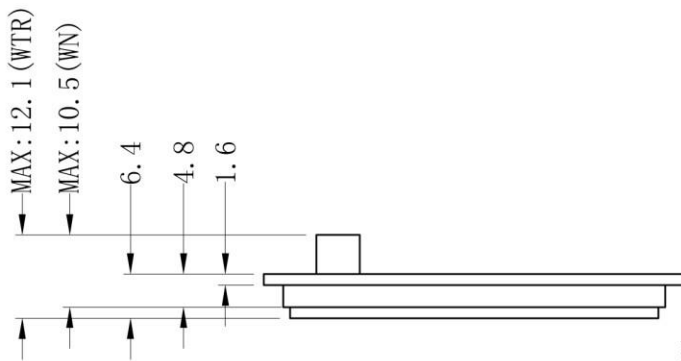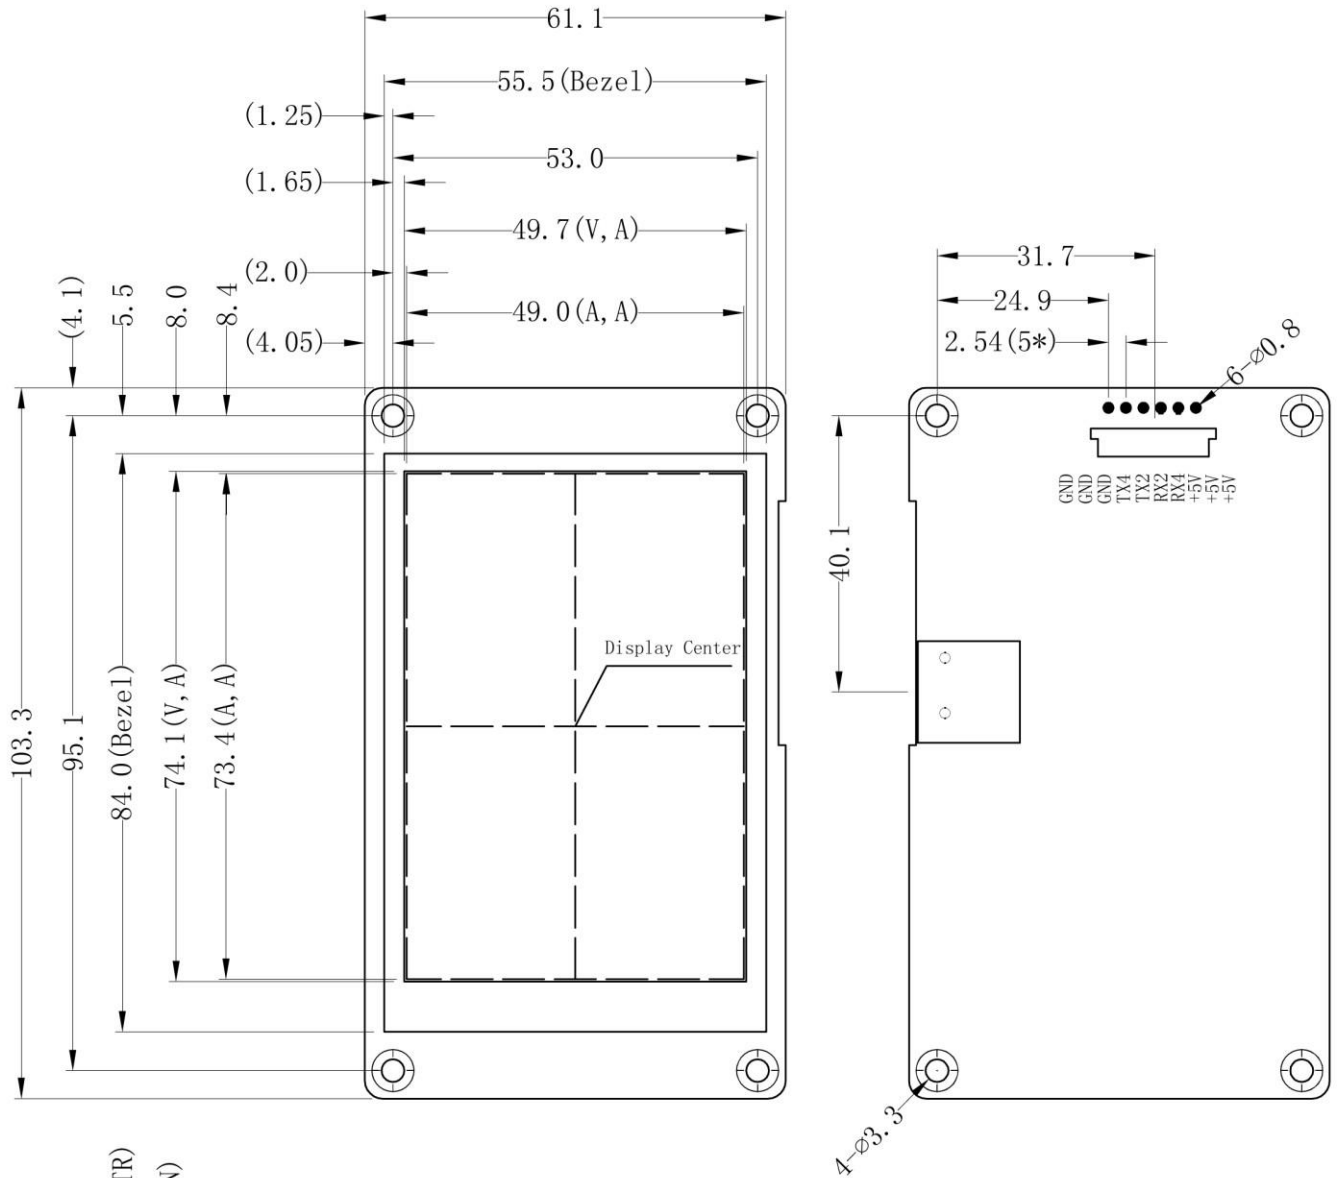

1. Location hole is used as position reference.
  2. Unmarked Tolerance is +/-0.3mm
- Active area is marked in Dash lines

Pin Type	Pin Name	Pin definition	Description
GND	8, 9, 10	P	Description Public Ground / GND
TX4	7	O	Divin screen serial output DOUT
TX2	6	O	Divin screen serial output DOUT
RX2	5	I	Divin screen serial input DIN
RX4	4	I	Divin screen serial input DIN
+5V	1, 2, 3	P	Power input

Model	DMG48320C035_03WTR				DWIN Technologies
Drawing	A 4		DWIN		
Scale					
Unit	MM				