


AGM-043A0-I1-R

Based on T5L ASIC 4.3 Inches, 480xRGBx272, 16.7M Colors, TN screen

RTP, Standard instruction set (TA) / DGUS II system, Cost-Effective screen

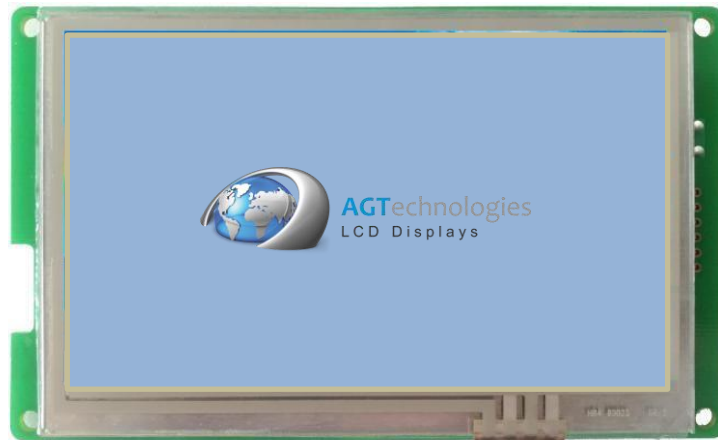

Record of Revision

Revise Date	Content
2019-03-20	First Edition
2019-05-15	Update the pictures

Display

Item	Parameter	Description
Color (A.A)	16.7M (16777216) colors 95.0mm (W) x 53.9mm (H)	24 bit color 8R8G8B 480x272
Resolution	480x272	Support 0° /90° /180° /270° rotated display
Backlight	LED	≥ 10000H (Continuous working with maximum brightness, time of brightness halves)
Brightness	200nit	TA system:64 levels adjustment; DGUS II system:100 levels adjustment (It's not recommend to set brightness to 1%~30% of the maximum,which may lead a flicker)

Note: Displaying of high-contrast still images for more than 30 minutes may result in residual images. Please add screen saver to avoid this problem.



Item	Conditions	Min	Typ	Max	Unit
Power Voltage	-	4.5	5.0	5.5	V
Operation Current	VCC = +5V, Backlight on	-	180	-	mA
	VCC = +5V, Backlight off	-	60	-	mA

5V 1A Recommended power supply: 5V 1A DC



Item	Conditions	Min	Typ	Max	Unit
Working Temperature	60%RH at 5V voltage	-20	25	70	°C
Storage Temperature	-	-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH
Protective Paint	-	-	None	-	-



Item	Conditions	Min	Typ	Max	Unit
Baudrate	User Set	3150	115200	3225600	bps
Output Voltage (TXD、BUSY)	Output 1, Iout = 8mA	3.0	-	4.5	V
	Output 0, Iout = -8mA	-	0	0.3	V
Input Voltage (RXD)	Input 1	2.7	3.3	-	V
	Input 0	0	-	1.2	V
Interface	UART2 : N81, 3.3V & 5VTTL/CMOS UART4 : N81/E81/O81/N82, 3.3V & 5V TTL/CMOS UART4 : Optional N81/E81/O81/N82 mode, 3.3V & 5V TTL/CMOS				
Socket	10Pin_1.0mm FCC Socket				
USB	None				
SD Slot	YES (SDHC/FAT32 Format)				

Memory

Item	Typical value	Features	Typ value	Unit	Description
FLASH (TA/DGUS II)	16Mbytes	Space of Font	4-12	Mbytes	A single font of 256Kbytes, store font, icon libraries, and other binary files
		Picture Storage	12-4	Mbytes	JPEG format (Picture quantity relate to JPEG size, size of a single JPG image file should not exceed 256Kbytes)
RAM (DGUS II)	128Kbytes	Variable Storage Space	/	/	Data is not saved when power down
Nor Flash (DGUS II)	320Kbytes	User database	/	/	Data is saved when power down

UI & Peripheral	
UI Version	TA / DGUS II (DGUS II pre-installed)
Peripheral	Resistive touchscreen, Speaker

Dimension				
Dimension	121.9(W) × 73.2(H) × 13.9(T) mm			
Net Weight	80g			
Packing Capacity				
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)
1 Carton1:	220mm(L)×160mm(W)×47mm (H)	1	2	2
2 Carton2:	250mm(L)×200mm(W)×80mm (H)	2	2	4
3 Carton3:	320mm(L)×270mm(W)×80mm (H)	2	4	8
4 Carton4:	450mm(L)×350mm(W)×300mm(H)	2	25	50

